

EXAMPLES OF ROLLASHIELD COMMERCIAL SHUTTERS



COMMERCIAL

www.ozroll.com.au

FOR FURTHER INFORMATION CONTACT:



Rollashield is a division of OZRoll Industries ABN 91 090 863 102 www.ozroll.com.au
174 Cavan Road, Dry Creek SA 5094 Freecall: 1800 OZROLL (697 655).




Rollashield®
ALUMINIUM ROLLER SHUTTERS

“Securing your premises & safeguarding your business.”

The Commercial Aluminium Roller Shutter range of products offer security and peace of mind when it comes to protecting your business. Aesthetically pleasing and available in a variety of colours the shutters have been manufactured to a high standard and with specially designed winged slat inserts that allows the curtain to lock into the guide channel for extra security.

STANDARD COLOURS AVAILABLE

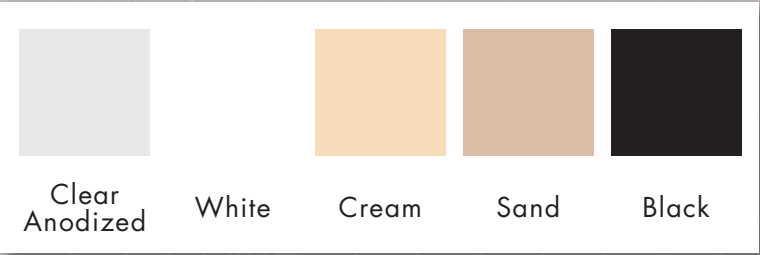

Note: Colours shown are for marketing purposes only and may differ from actual product colours. Please ask your distributor for a colour sample if unsure before placing an order.

INTERMESH

Tough and durable the One to One Security Mesh not only provides security but also allows for your business to remain “visible.”

Technical Specifications Security Mesh One To One	
Profile Width	42mm
Curtain Weight	6.5kg/m²
Size Range Width	600mm to 4000mm (Single Span)
Size Range Height	1000mm to 3000mm
Maximum Size	10m²
Control Options	Manual Spring Loaded Max 50kg, Manual Winder & Motorised Controls
Box Sizes Available	180mm, 205mm, 250mm & 300mm
Materials Used	95% Aluminium With Some Plastics, Rubber & Steel
Colour Range	Clear Anodized, White, Cream, Sand & Black
Installation Options	Face & Reveal Installation Available



FORCESHIELD (UNPUNCHED)

Forceshield is the superior choice for securing your premises and safeguarding your business interests. The shutter has also been Bushfire tested to a BAL 40 rating and has a Cat3 Cyclone classification (AS1170.2-1989).

Technical Specifications Forceshield (Unpunched)	
Profile Width	37mm
Curtain Weight	7.5kg/m²
Size Range Width	600mm to 4500mm (Single Span)
Size Range Height	1000mm to 3500mm
Maximum Size	14m²
Control Options	Manual Spring Loaded Max 50kg, Manual Winder & Motorised Controls
Box Sizes Available	180mm, 205mm, 250mm & 300mm
Materials Used	95% Aluminium With Some Plastics, Rubber & Steel
Colour Range	Clear Anodized, White, Cream, Sand & Black
Installation Options	Face & Reveal Installation Available
Special Features	BAL 40 Bushfire Rated, CAT 3 Cyclone Rated AS1170.2-1989, Sound Transmission Class 39 AS 1276-1979 (Window & Shutter)



FORCESHIELD (PUNCHED)

The Forceshield (Punched) allows for light and airflow into your business premises while still maintaining security and protection. This product has been given a Cat 3 Cyclone rating (AS1170.2-1989) and a Sound Transmission Class 39 (AS1276-1979).

Technical Specifications Forceshield (Punched)	
Profile Width	32.5mm
Curtain Weight	8kg/m²
Size Range Width	600mm to 4000mm (Single Span)
Size Range Height	1000mm to 3500mm
Maximum Size	12m²
Control Options	Manual Winder & Motorised Controls
Box Sizes Available	180mm, 205mm, 250mm & 300mm
Materials Used	95% Aluminium With Some Plastics, Rubber & Steel
Colour Range	Clear Anodized, White, Cream, Sand & Black
Installation Options	Face & Reveal Installation Available
Special Features	CAT 3 Cyclone Rated AS1170.2-1989, Sound Transmission Class 39 AS 1276-1979 (Window & Shutter)

